





MAQUINARIA
DE CANTERAS
TRIMAN, S.A.U.

Triman
Wheel
washer

LNT



LNT WHEEL WASHER

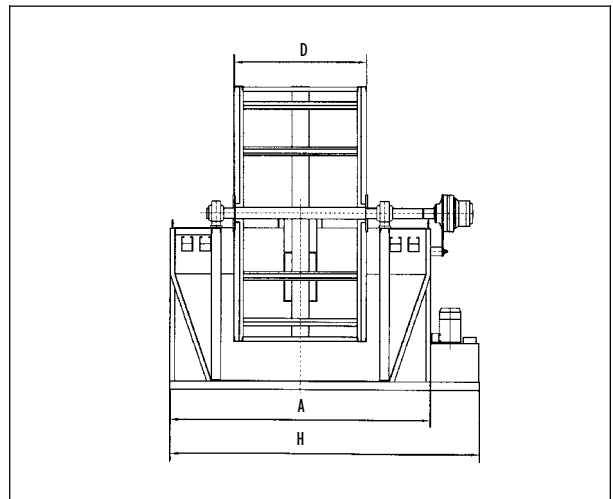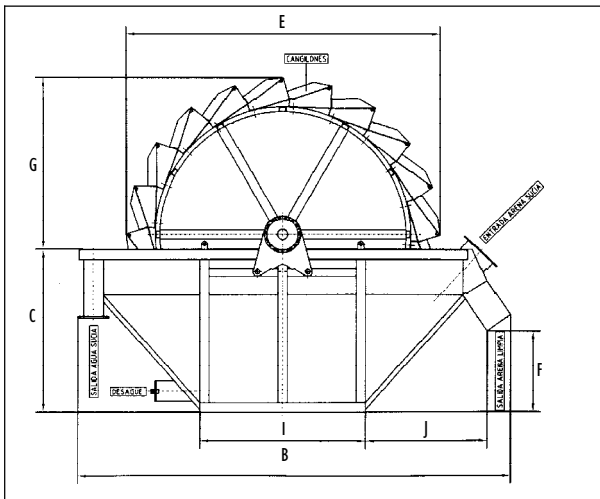

Specifications of LNT wheel washer

MODEL	N° SCCOPS	ROWS OF ANGLE PIECES	SCOOP WIDTH	POWER Kw	TRANSMISSION	PRODUCTION m ³ / HOUR
LNT-50	18	1	700	2	Hydraulique	50
LNT-75	36	2	700	3	Hydraulique	75
LNT-100	40	2	700	4	Hydraulique	100

MODEL	A	B	C	D	E	F	G	H	J	K
LNT-50	2.090	4.356	1.580	710	3.102	697	4.170	2.620	1.600	1.244
LNT-75	2.830	4.430	1.620	1.440	3.108	737	1.713	3.360	1.600	1.284
LNT-100	2.830	4.702	1.750	1.440	3.406	867	1.863	3.360	1.800	1.314

The LNT wheel washers designed by TRIMAN are used to recover sand contained in the wash water. Fine particle loss is minimized with a high draining capacity.

This is a very rugged model that is practically maintenance free. We are pioneers in installing epicycloidal motor reducers driven by hydraulic motors mounted directly on the axle. This innovative TRIMAN design eliminates the need for complex mechanisms with pulleys, belts, pinions, etc. and improves performance output.



Maquinaria de Canteras Triman, S.A. reserves the right to modify the content of this catalog without prior notification.



Central Office:
Yanguas y Miranda, 1 Bajo
Apdo. de Correos n° 359
31080 PAMPLONA
Tel.: 902 153 021
Fax: 948 207 101
e-mail: comercial@triman.es
www.triman.es

Factory:
Pol. Ondarria, s/n.
31800 ALSASUA Navarra